


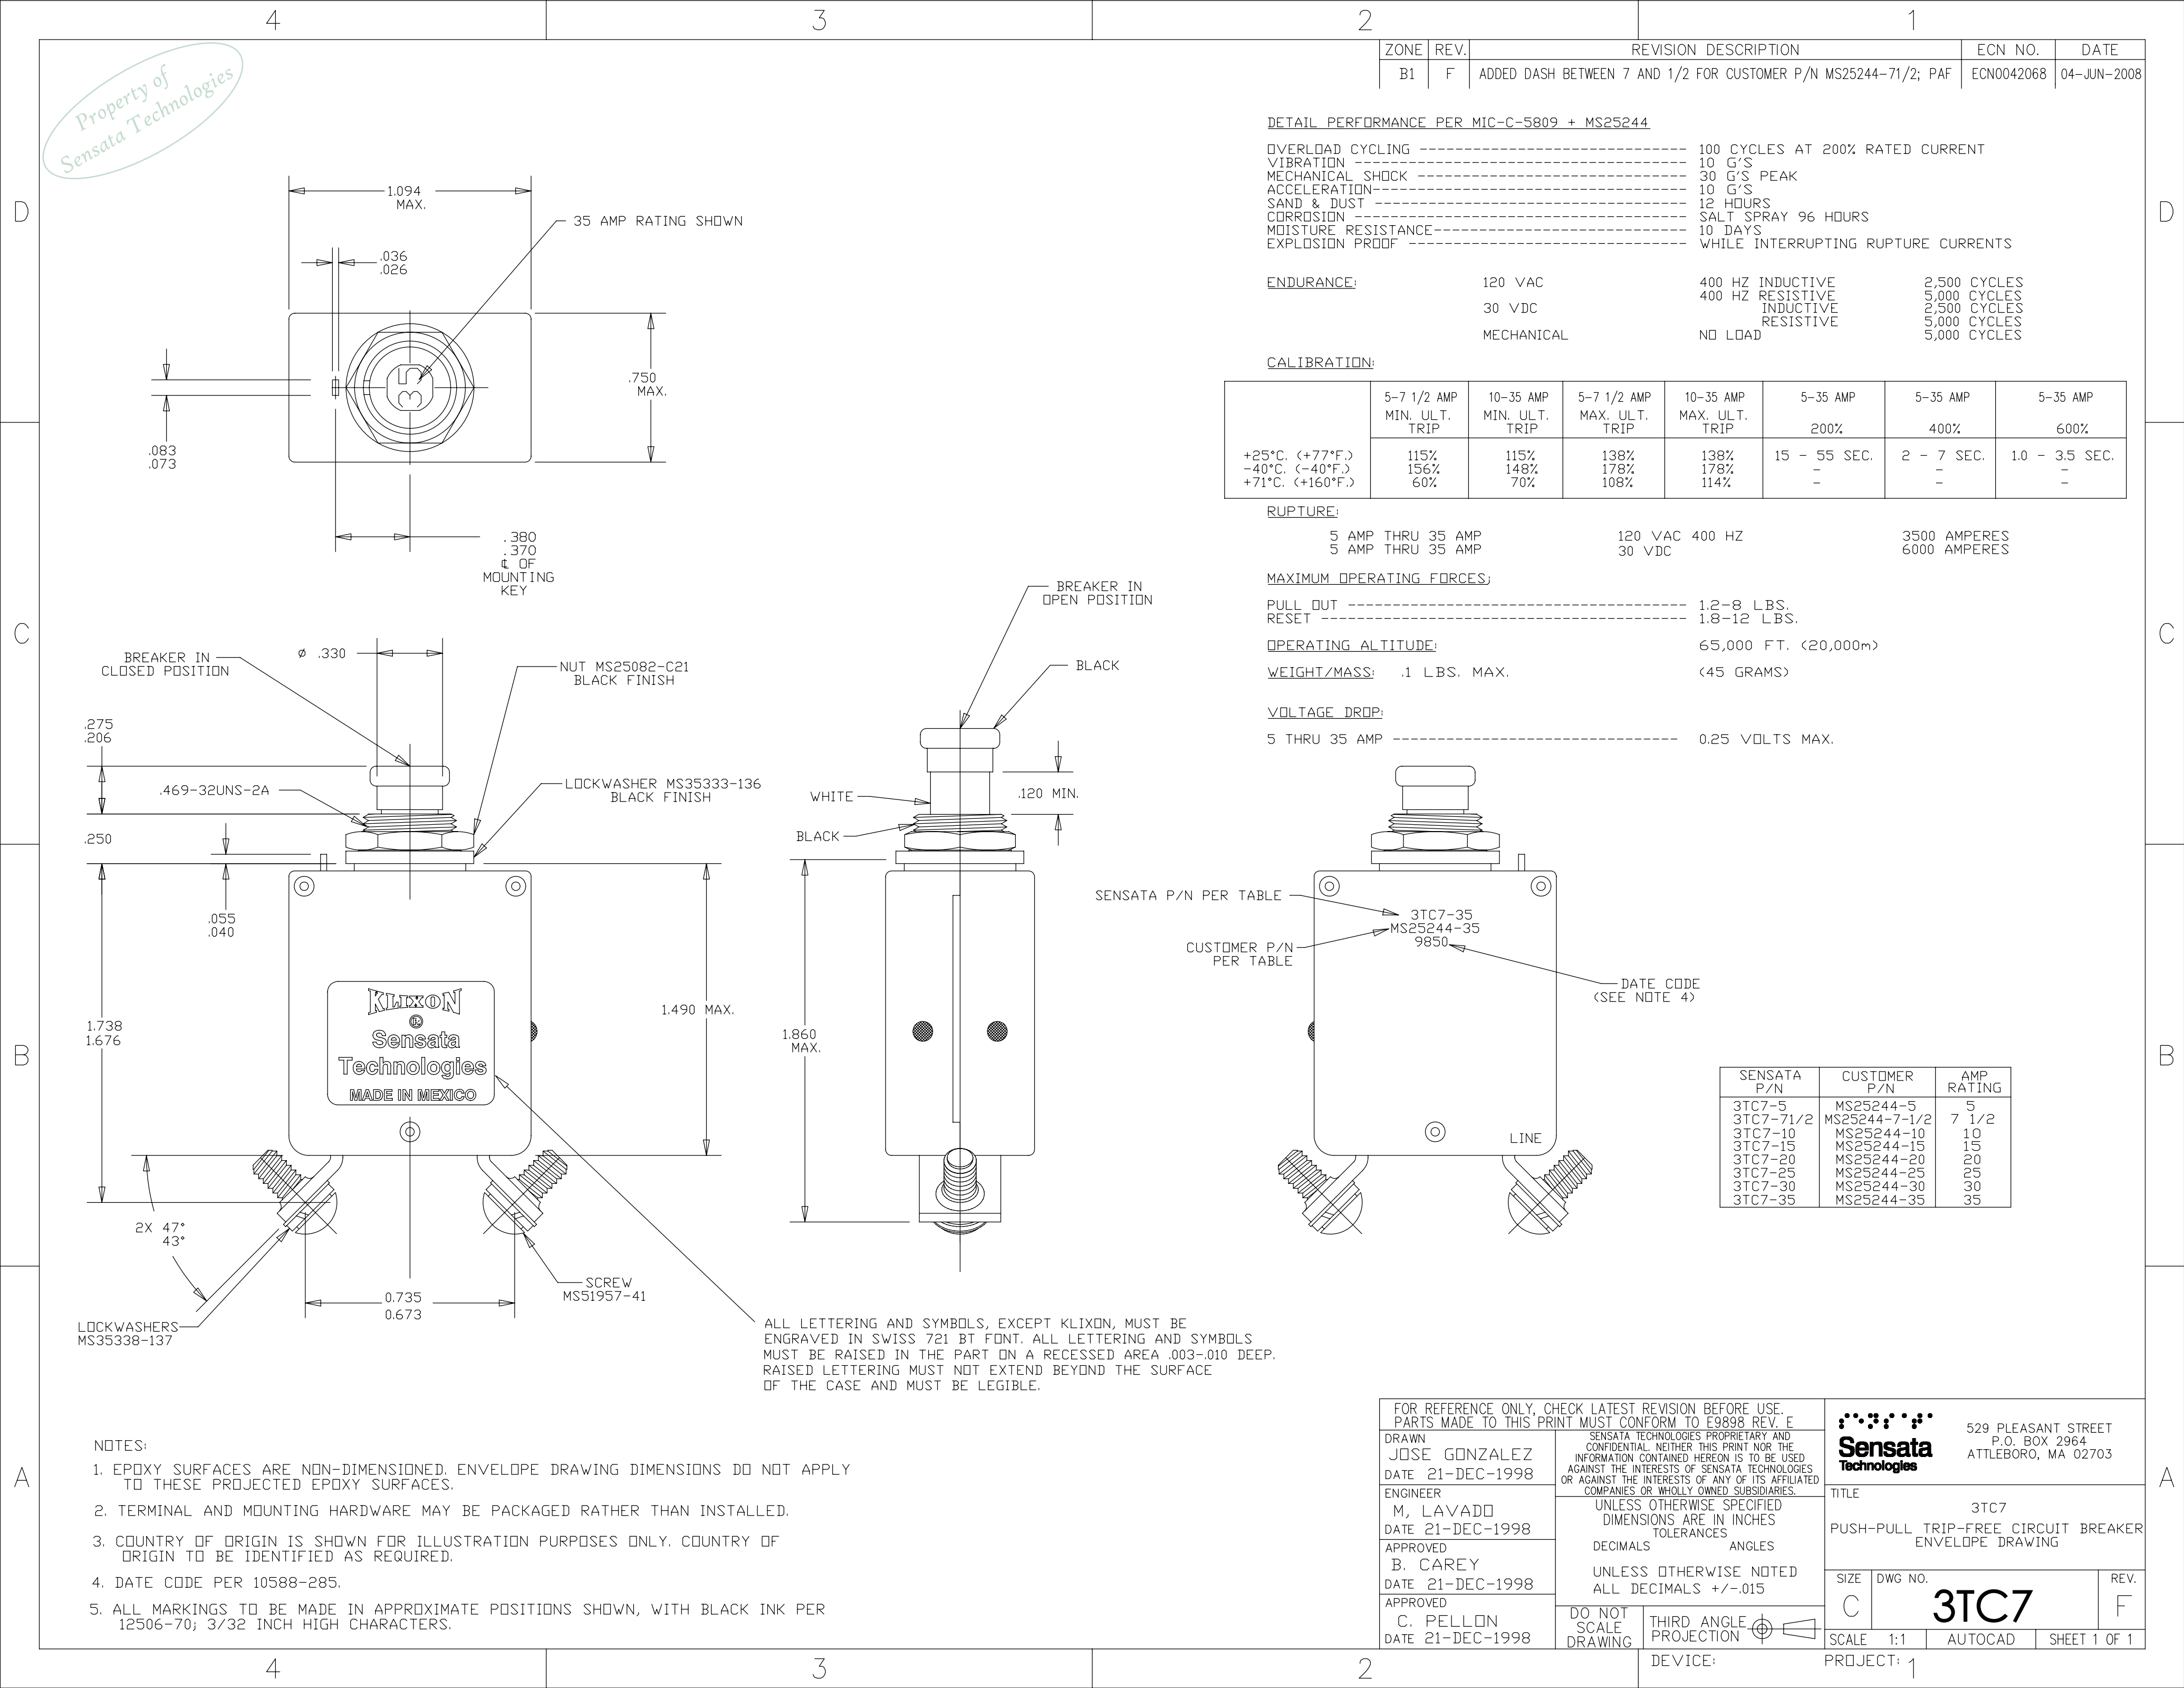

Property of
Sensata Technologies

ZONE	REV.	REVISION DESCRIPTION	ECN NO.	DATE
B1	F	ADDED DASH BETWEEN 7 AND 1/2 FOR CUSTOMER P/N MS25244-71/2; PAF	ECN0042068	04-JUN-2008

DETAIL PERFORMANCE PER MIC-C-5809 + MS25244

OVERLOAD CYCLING	-----	100 CYCLES AT 200% RATED CURRENT
VIBRATION	-----	10 G'S
MECHANICAL SHOCK	-----	30 G'S PEAK
ACCELERATION	-----	10 G'S
SAND & DUST	-----	12 HOURS
CORROSION	-----	SALT SPRAY 96 HOURS
MOISTURE RESISTANCE	-----	10 DAYS
EXPLOSION PROOF	-----	WHILE INTERRUPTING RUPTURE CURRENTS

ENDURANCE:	120 VAC	400 HZ INDUCTIVE	2,500 CYCLES
	30 VDC	400 HZ RESISTIVE	5,000 CYCLES
		INDUCTIVE	2,500 CYCLES
		RESISTIVE	5,000 CYCLES
	MECHANICAL	NO LOAD	5,000 CYCLES

CALIBRATION:

	5-7 1/2 AMP MIN. ULT. TRIP	10-35 AMP MIN. ULT. TRIP	5-7 1/2 AMP MAX. ULT. TRIP	10-35 AMP MAX. ULT. TRIP	5-35 AMP 200%	5-35 AMP 400%	5-35 AMP 600%
+25°C. (+77°F.)	115%	115%	138%	138%	15 - 55 SEC.	2 - 7 SEC.	1.0 - 3.5 SEC.
-40°C. (-40°F.)	156%	148%	178%	178%	-	-	-
+71°C. (+160°F.)	60%	70%	108%	114%	-	-	-

RUPTURE:

5 AMP THRU 35 AMP	120 VAC 400 HZ	3500 AMPERES
5 AMP THRU 35 AMP	30 VDC	6000 AMPERES

MAXIMUM OPERATING FORCES:

PULL OUT	-----	1.2-8 LBS.
RESET	-----	1.8-12 LBS.

OPERATING ALTITUDE:

65,000 FT. (<20,000m)

WEIGHT/MASS:

.1 LBS. MAX. (<45 GRAMS)

VOLTAGE DROP:

5 THRU 35 AMP ----- 0.25 VOLTS MAX.

SENSATA P/N	CUSTOMER P/N	AMP RATING
3TC7-5	MS25244-5	5
3TC7-7 1/2	MS25244-7-1/2	7 1/2
3TC7-10	MS25244-10	10
3TC7-15	MS25244-15	15
3TC7-20	MS25244-20	20
3TC7-25	MS25244-25	25
3TC7-30	MS25244-30	30
3TC7-35	MS25244-35	35

- NOTES:
- EPOXY SURFACES ARE NON-DIMENSIONED. ENVELOPE DRAWING DIMENSIONS DO NOT APPLY TO THESE PROJECTED EPOXY SURFACES.
 - TERMINAL AND MOUNTING HARDWARE MAY BE PACKAGED RATHER THAN INSTALLED.
 - COUNTRY OF ORIGIN IS SHOWN FOR ILLUSTRATION PURPOSES ONLY. COUNTRY OF ORIGIN TO BE IDENTIFIED AS REQUIRED.
 - DATE CODE PER 10588-285.
 - ALL MARKINGS TO BE MADE IN APPROXIMATE POSITIONS SHOWN, WITH BLACK INK PER 12506-70; 3/32 INCH HIGH CHARACTERS.

FOR REFERENCE ONLY, CHECK LATEST REVISION BEFORE USE. PARTS MADE TO THIS PRINT MUST CONFORM TO E9898 REV. E		 529 PLEASANT STREET P.O. BOX 2964 ATTLEBORO, MA 02703	
DRAWN JOSE GONZALEZ DATE 21-DEC-1998	ENGINEER M. LAVADO DATE 21-DEC-1998	TITLE 3TC7 PUSH-PULL TRIP-FREE CIRCUIT BREAKER ENVELOPE DRAWING	
APPROVED B. CAREY DATE 21-DEC-1998	APPROVED C. PELLON DATE 21-DEC-1998	SIZE C	REV. F
DO NOT SCALE DRAWING		THIRD ANGLE PROJECTION	SCALE 1:1
DEVICE:		AUTOCAD	SHEET 1 OF 1
PROJECT: 1			